

Coil Rod

Quickly adapt to changing concrete forming conditions by keeping a supply of coil rod on hand



Coil Rod can be used for a variety of concrete forming applications, including form ties, inserts and coil tie combinations.

Coil Rod			
Part No.	Description	Load*	Weight/ea
SBCR12	Coil Rod 1/2" x 12'	9,000 lbs	6.4 lbs
SBCR58	Coil Rod 5/8" x 12'	12,000 lbs	10.2 lbs
SBCR34	Coil Rod 3/4" x 12'	18,000 lbs	14.4 lbs
SBCR1	Coil Rod 1" x 12'	38,000 lbs	25.1 lbs
SBCR114	Coil Rod 1-1/4" x 12'	56,000 lbs	42.0 lbs
SBCR112	Coil Rod 1-1/2" x 12'	68,000 lbs	61.8 lbs


* Load rating based on 2:1 safety factor.

Coil Rod is also available cut-to-size, with left-hand thread and/or electro-galvanized. Contact a SureBuilt representative for pricing and availability.



Coil Nut			
Part No.	Description	Load* Standard	Load* Heavy Hex
SB361200	Coil Nut 1/2"	6,000 lbs	9,000 lbs
SBCN58	Coil Nut 5/8"	8,000 lbs	12,000 lbs
SB361210	Coil Nut 3/4"	9,000 lbs	18,000 lbs
SB361215	Coil Nut 1"	24,000 lbs	38,000 lbs
SBCN114	Coil Nut 1-1/4"	36,000 lbs	56,000 lbs
SBCN112	Coil Nut 1-1/2"	47,500 lbs	68,000 lbs

* Load rating based on 2:1 safety factor.

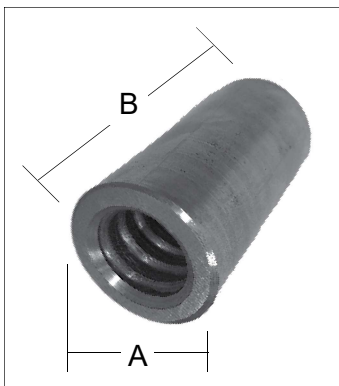

The coil thread is tapped from each side, providing a stop within the center of the coupler.

Coil Rod Coupler				
Part No.	Description	Dia (A)	Length (B)	Tension*
SBCRC12	Coil Rod Coupler 1/2"	3/4"	2-3/4"	9,000 lbs
SBCRC58	Coil Rod Coupler 5/8"	1"	3-1/4"	12,000 lbs
SBCRC34	Coil Rod Coupler 3/4"	1-1/8"	3-1/4"	18,000 lbs
SBCRC1	Coil Rod Coupler 1"	1-1/2"	4-1/2"	38,000 lbs
SBCRC114	Coil Rod Coupler 1-1/4"	1-7/8"	5-3/4"	56,000 lbs
SBCRC112	Coil Rod Coupler 1-1/2"	2-1/8"	7"	68,000 lbs

** Load rating based on 2:1 safety factor.*