

# Coil Rod

Quickly adapt to changing concrete forming conditions by keeping a supply of coil rod on hand



Coil Rod can be used for a variety of concrete forming applications, including form ties, inserts and coil tie combinations.

| Coil Rod |                       |            |           |
|----------|-----------------------|------------|-----------|
| Part No. | Description           | Load*      | Weight/ea |
| SBCR12   | Coil Rod 1/2" x 12'   | 9,000 lbs  | 6.4 lbs   |
| SBCR58   | Coil Rod 5/8" x 12'   | 12,000 lbs | 10.2 lbs  |
| SBCR34   | Coil Rod 3/4" x 12'   | 18,000 lbs | 14.4 lbs  |
| SBCR1    | Coil Rod 1" x 12'     | 38,000 lbs | 25.1 lbs  |
| SBCR114  | Coil Rod 1-1/4" x 12' | 56,000 lbs | 42.0 lbs  |
| SBCR112  | Coil Rod 1-1/2" x 12' | 68,000 lbs | 61.8 lbs  |


\* Load rating based on 2:1 safety factor.

Coil Rod is also available cut-to-size, with left-hand thread and/or electro-galvanized. Contact a SureBuilt representative for pricing and availability.



| Coil Nut |                 |                |                 |
|----------|-----------------|----------------|-----------------|
| Part No. | Description     | Load* Standard | Load* Heavy Hex |
| SB361200 | Coil Nut 1/2"   | 6,000 lbs      | 9,000 lbs       |
| SBCN58   | Coil Nut 5/8"   | 8,000 lbs      | 12,000 lbs      |
| SB361210 | Coil Nut 3/4"   | 9,000 lbs      | 18,000 lbs      |
| SB361215 | Coil Nut 1"     | 24,000 lbs     | 38,000 lbs      |
| SBCN114  | Coil Nut 1-1/4" | 36,000 lbs     | 56,000 lbs      |
| SBCN112  | Coil Nut 1-1/2" | 47,500 lbs     | 68,000 lbs      |

\* Load rating based on 2:1 safety factor.

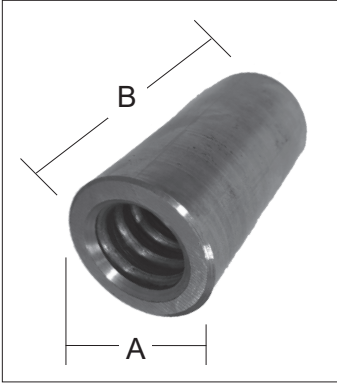

*The coil thread is tapped from each side, providing a stop within the center of the coupler.*

| Coil Rod Coupler |                         |         |            |            |
|------------------|-------------------------|---------|------------|------------|
| Part No.         | Description             | Dia (A) | Length (B) | Tension*   |
| SBCRC12          | Coil Rod Coupler 1/2"   | 3/4"    | 2-3/4"     | 9,000 lbs  |
| SBCRC58          | Coil Rod Coupler 5/8"   | 1"      | 3-1/4"     | 12,000 lbs |
| SBCRC34          | Coil Rod Coupler 3/4"   | 1-1/8"  | 3-1/4"     | 18,000 lbs |
| SBCRC1           | Coil Rod Coupler 1"     | 1-1/2"  | 4-1/2"     | 38,000 lbs |
| SBCRC114         | Coil Rod Coupler 1-1/4" | 1-7/8"  | 5-3/4"     | 56,000 lbs |
| SBCRC112         | Coil Rod Coupler 1-1/2" | 2-1/8"  | 7"         | 68,000 lbs |

*\* Load rating based on 2:1 safety factor.*